


No. 570 - HOT OIL SHEET

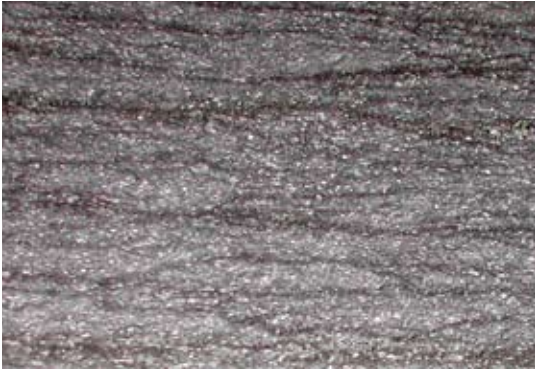

Description: A special chrysolite fiber sheet, NBR binder recommended for sealing hot oil and petroleum derivatives.

Service: Saturated steam, water, brine, mild acids, alkalis, air, oils, petroleum, solvents, refrigerants.

Temperature Limit: -40°F to 1000°F.

Pressure Limit: 2030 PSI.

Length: 59" x 63", Larger sizes available upon request.

Non-Stock, Special Order.

Part #	Size	ISSA #
570-164	1/64"	--
570-132	1/32"	811061
570-116	1/16"	811063
570-332	3/32"	--
570-180	1/8"	811064

No. 575 - WIRE INSERTED WITH SBR BINDER



Description: A premium service chrysolite fiber sheet reinforced with woven wire mesh bonded with SBR. Recommended for sealing applications where temperature and pressure fluctuate.

Service: Saturated steam, water, brine, mild acids, alkalis, air, oils, petroleum, solvents, and refrigerants.

Temperature Limit: -40°F to 1000°F.

Pressure Limit: 3050 PSI.

Length: 59" x 63", Larger sizes available upon request.

Non-Stock, Special Order.

Part #	Size	ISSA #
575-132	1/32"	811041
575-116	1/16"	811042
575-332	3/32"	811043
575-180	1/8"	811044